SonicWALL TELE3
Internet Security Appliance

The TELE3 Internet security appliance is an easy-to-deploy, enterprise-class firewall and VPN connectivity solution for telecommuters and day-extenders that require fast and secure access to their organization's network resources. With its intuitive Web management interface and administration wizards, the TELE3 reduces the time and cost of installing and managing secure connectivity access.

The desktop TELE3 provides hardened firewall protection with an ICSA-certified, stateful inspection firewall with integrated IPSec VPN. The TELE3 delivers fast, secure access to corporate resources and is compatible with any manufacturer's IPSec-compliant VPN gateway.

Built on the SonicWALL CyberSentry Security Processor, the TELE3 delivers the fastest performance in its class with hardware-accelerated 3DES VPN and unmatched security throughput. By offloading processing overhead associated with encryption, the CyberSentry Security Processor guarantees the best performance for broadband connections.

The TELE3 also supports the comprehensive portfolio of SonicWALL security services, including Network Anti-Virus, Content Filtering, and Authentication Service. This eliminates the cost and complexity of integrating separate devices and software packages.

A standards-based appliance, the TELE3 requires no operating system maintenance often found in software-based security products. The TELE 3 fits perfectly into a large corporate network infrastructure and can be managed by a wide array of local or remote options including CLI, Web-interface, and SNMP. For centralized management and policy setting, the SonicWALL Global Management System is designed to reduce administration overhead as security requirements scale.

The TELE3 Internet security appliance meets the demands of growing businesses and adapts to network security threats, protecting an organization's valuable data. With SonicWALL's CyberSentry Security Processor, the TELE3 delivers maximum multi-user firewall and VPN performance.

SECURITY

> Firewall

VPN

Anti-Virus

Content Filtering

Vulnerability Scan

Authentication

SSL Acceleration

SonicWALL TELE3

- **CyberSentry Security Processor for fast firewall and 3DES VPN performance**
- **Easy management interface reduces deployment time and costs**
- **IPSec VPN delivers secure access through any IPSec-compliant VPN gateway**
- **ICSA-certified stateful packet firewall for enterprise-class protection**

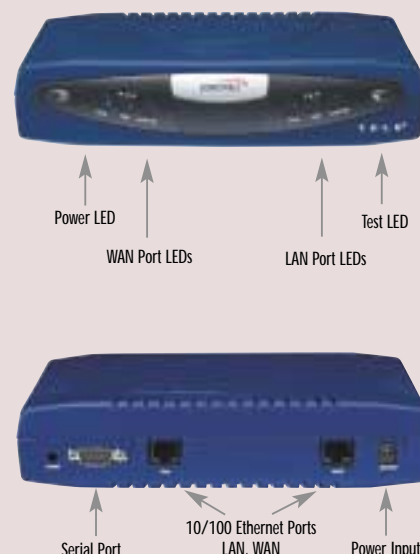TELE3   SOHO3   PRO 100   PRO 200   PRO 300   GX Series

SECURITY

SonicWALL TELE3
Internet Security Appliance

SonicWALL TELE3 Features and Benefits

- **Intuitive Web Management Interface.** The TELE3 includes an easy-to-use Web management interface and adminis-tration wizards to dramatically reduce the time and cost of deploying secure connectivity.

- **IPSec VPN.** The TELE3's enterprise-class VPN delivers fast, secure access to corporate resources and is compatible with any manufacturer's IPSec-compliant VPN gateway.

- **Comprehensive Security Solution.** The TELE3 provides everything needed for secure connectivity and supports SonicWALL's comprehensive portfolio of security services, such as Network Anti-Virus, Internet Content Filtering, and Authentication Service, without the need to install separate devices and software packages.

- **ICSA-Certified Stateful Packet Firewall.** The TELE3 adheres to industry standards for enterprise-class firewall protection with ICSA-certified, stateful packet inspection technology.

- **Powerful Architecture with CyberSentry Security Processor.** Built on the SonicWALL CyberSentry Security Processor, the TELE3 delivers breakthrough performance with hardware-accelerated 3DES VPN. By offloading processing overhead associated with encryption, the CyberSentry Security Processor guarantees the best possible performance for broadband connections.

- **AutoUpdate Security.** SonicWALL's AutoUpdate service sends automatic alerts of new software and feature updates as soon as they're available to ensure administrators keep network security current and lower maintenance costs.

- **Flexible Remote Management.** The TELE3 fits perfectly into a large corporate network infrastructure and reduces administration overhead because it can be managed locally, on a device-by-device basis using CLI, or globally using SonicWALL Global Management System.

- **Complete Network Protocol Support.** The TELE3 supports the full complement of broadband connectivity requirements, including NAT and DHCP, to allow all users to share a broadband Internet connection. It also supports Point-to-Point Protocol over Ethernet (PPPoE), a widely used protocol for DSL connections.

Power LED   Test LED
WAN Port LEDs   LAN Port LEDs

Serial Port   10/100 Ethernet Ports LAN, WAN   Power Input

SonicWALL TELE3 Product Part Numbers

01-SSC-2910 SonicWALL TELE3 (US/Canada)
01-SSC-2911 SonicWALL TELE3 (International)
01-SSC-2912 SonicWALL TELE3 (Japan)

Value-Added Security Services

SonicWALL Internet security appliances integrate seamlessly with an expanding array of value-added security services to provide a comprehensive security solution.

For more information on these SonicWALL security services, please visit our Web site at
www.sonicwall.com/products/services.asp

SonicWALL's ICSA-certified Internet security appliances consistently receive awards from industry-leading publications.

SonicWALL TELE3 Technical Specifications

Processor: Toshiba-133MHz with CyberSentry Security Processor

RAM: 16 MB

Flash Memory: 4 MB

Interfaces: (1) WAN 10/100 Base-T auto-sensing
(1) LAN 10/100 Base-T auto-sensing
(1) Serial Port

Concurrent Connections: 6,000

Firewall Performance: 75 Mbps

Firewall Users: 5 Users

3DES (168-Bit): 20 Mbps

VPN Tunnels: 5

Dimensions: 8.25 x 6.5 x 2 inches
(20.9 x 16.5 x 5.1 cm)

Weight: 1.1 lbs. (.48 kg)

LEDs: Status (Power, Test)
Ethernet (Link, 100, Activity)

Power: 100V to 240V AC

Standards:
TCP/IP, UDP, ICMP, HTTP, RADIUS, IPSec, IKE, SNMP, FTP, DHCP, PPPoE

Certifications:
ICSA Firewall

Regulatory Compliance:
UL, CE, GS Mark, VCCI, FCC Part 15, TUV, C-Tick

Environment:
Temperatures 40-105 F, 5-40 C
Humidity 5-90% non-condensing

SOLUTIONS

DS1201_US_TELE3